

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)


PCT

(10) International Publication Number
WO 2005/021230 A1

- (51) International Patent Classification⁷: **B29C 44/12**, 44/08
- (21) International Application Number: PCT/BE2004/000122
- (22) International Filing Date: 27 August 2004 (27.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
03447217.5 27 August 2003 (27.08.2003) EP
- (71) Applicant (for all designated States except US): RECTICEL [BE/BE]; Plejadenlaan 15, B-1200 Brussels (BE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): DE WINTER, Hugo [BE/BE]; c/o Recticel, Damstraat 2, B-9230 Wetteren (BE). VANLUCHENE, Yvan [BE/BE]; c/o Recticel, Damstraat 2, B-9230 Wetteren (BE). THIENPONT, Raphael [BE/DE]; Höhenstrasse 12, D-53547 Hümmerich (DE). LAEIS, Christoph [DE/DE]; Frankfurter strasse 91a, D-53773 Hennef (DE).
- (54) Agents: VAN REET, Joseph et al.; Gevers & Vander Haeghen, Holidaystraat 5, B-1831 Diegem (BE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A COMPOSITE TRIM PART FOR THE INTERIOR OF AN AUTOMOTIVE VEHICLE

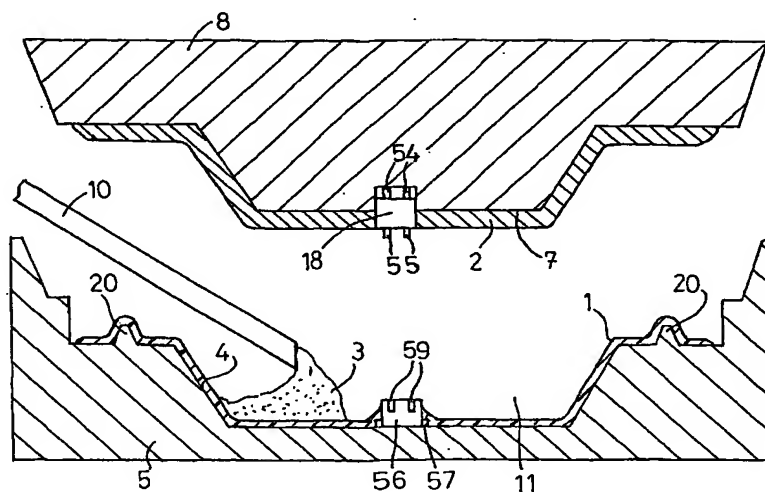

(57) Abstract: For manufacturing the composite automotive trim part a flowable skin material is applied onto a first mould surface (4), a flowable substrate material is applied onto a second mould surface (7), the mould (5, 8) is closed and a foamable material (3) is applied in the gap between the flexible skin layer (1) and the rigid substrate layer (2). Both the flexible skin layer and the rigid substrate layer can be manufactured by spraying a polyurethane reaction mixture. Advantages are that no positioning of the rigid substrate layer for of the flexible skin layer is required and that especially the rigid substrate layer doesn't have to be manufactured separately, so that the production costs are reduced and the quality of the trim part is increased. The sealing of the mould cavity for producing the foam layer is achieved by providing a sufficiently thick layer of flexible skin material in the zone of contact with the substrate layer. Installation and tool costs can be reduced by separating both mould halves and producing the skin layer and the substrate layer along different production lines.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.